




Europäisches
Patentamt

European
Patent Office

Office européen
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02079305.5

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:
Application no.: 02079305.5
Demande no:

Anmeldetag:
Date of filing: 17.10.02
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.
Groenewoudseweg 1
5621 BA Eindhoven
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Method and device for signal amplitude detection

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

H04L25/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

Method and device for signal amplitude detection

EPO - DG 1

17. 10. 2002

(83)

Present invention relates to a method and a device for signal amplitude detection. More in particular, the present invention relates to a method and a device for determining the amplitude of a signal having a first signal level and a second signal level, such as binary signals.

5 Signals of this kind typically have an average signal level, which is halfway between the said first and second signal levels. The average signal level could be particularly zero volts when the first and the second levels are symmetrically to zero volt level i.e. they are +V and -V. The amplitude of the above mentioned signals is defined as the half difference between the first level and the second level.

10 In many applications it is desirable or necessary to determine the amplitude of the signal in a simple manner. It is furthermore desirable to control the signal levels relative to the average signal level for compatibility with any supply voltages of the circuits processing the signal. The average signal level determines a DC component in the signal.

15 It is therefore an object of the present invention to provide a method for determining the amplitude of a signal having a first signal level and a second signal level, the method comprising the steps of:

- removing any DC component from the signal so as to produce an intermediate signal having an average level equal to a reference level,
- shifting the intermediate signal by a shift amount so as to produce a shifted
- 20 signal having a first signal level equal to the reference level; and
- providing said shift amount as an indication of the amplitude of the signal.

25 By shifting the signal in such a way that a first signal level equals a reference level, which reference level is preferably predetermined, the average signal level is shifted by an amount equal to its amplitude. As a result, the amount of the signal shift represents the amplitude of the signal.

 Additionally, shifting the average signal level allows control of all signal levels, thus making it possible that signal levels stay within suitable limits.

Preferably, the shift amount is determined on the basis of the shifted signal and the reference level. That is, the amount of the signal shift is obtained from the shifted signal itself and the reference level. This typically involves the use of feedback.

Advantageously, the shift amount is continuously determined. Thus the signal level is shifted by the correct amount, irrespective of any changing external circumstances, and a reliable amplitude measurement is obtained.

It will be understood that in situations where the original signal has a DC level equal to zero, the step of removing any DC component from the signal may be omitted.

The present invention further provides a device for determining the amplitude of a signal having a first signal level and a second signal level, the device comprising:

- a decoupling circuit for removing any DC component from the signal so as to produce an intermediate signal having an average level equal to a reference level,
- a shift circuit for shifting the intermediate signal by a shift amount so as to produce a shifted signal having a first signal level equal to the reference level, and
- an output terminal for providing said shift amount as an indication of the amplitude of the signal.

Such a device employs the same inventive concept as the method described above: by shifting the signal level over an amount equal to its amplitude, the amplitude itself is obtained.

Preferably, the shift circuit is coupled to an output of a differential amplifier which is coupled to receive the reference level and an indication of the power of the shifted signal.

Advantageously, a signal power determination circuit is coupled between the shift circuit and the differential amplifier.

It will be understood that in situations where the original signal has a DC level equal to zero, the decoupling circuit may be omitted.

In a preferred embodiment, the reference level is equal to a supply voltage, such as a positive supply voltage. However, other reference levels, such as those generated by dedicated circuits, may also be used.

The present invention will further be explained below with reference to exemplary embodiments illustrated in the accompanying drawings, in which:

Fig. 1 schematically shows a circuit diagram of an amplitude detector according to the present invention;

Fig. 2 schematically shows input signals which may be applied to the circuit of Fig. 1;

5 Fig. 3 schematically shows the signals of Fig. 2 as effected by the circuit of Fig. 1; and

Fig. 4 schematically shows an embodiment of the amplitude detector of the present invention.

The amplitude detector 1 shown merely by way of non-limiting example in
10 Fig. 1 comprises a decoupling circuit 2, a shift circuit 3, an output terminal 4, a differential amplifier 5, a signal power determination circuit 6, input terminals 7 and a coupling circuit 8.

The decoupling circuit 2 is constituted by two capacitors, which remove any DC component present in the signal supplied to the input terminals 7. The shift circuit 3 is known per se, however an advantageous embodiment will be discussed below with reference
15 to Fig. 4. The output terminal 4 is connected to the output of differential amplifier 5. The input terminals of differential amplifier 5 are connected to the signal power determination circuit 6 and to the reference voltage V_{ref} respectively. The reference voltage may conveniently be a supply voltage of the circuit, or ground.

Signal power determination circuit 6 is known per se, however an
20 advantageous embodiment will be discussed below with reference to Fig. 4. Signal power determination circuit 6 rectifies the signal and preferably determines the so-called root mean square value of the signal, a well-known measure for the energy contained in the signal. Coupling circuit 8, constituted by two resistors, couples the intermediary signal i. e. the input signal from which the DC component has been removed) to the non-inverting input of
25 differential amplifier 5.

The operation of the amplitude detector 1 of Fig. 1 will now be explained with reference to Figs. 2 and 3, which show exemplary signals.

Fig. 2 shows an first signal A supplied to a first (e.g. top) input terminal 7 and a second signal B supplied to a second (e.g. bottom) input terminal 7. Together, these signals
30 constitute the input signal V_{in} . As can be seen from Fig. 2, the second signal B is the inverse of the first signal A i.e. mutually in anti-phase with the first signal A. To avoid any unnecessary complications, it is assumed that the average signal level (DC component) of the complimentary signals A and B is zero.

The shift circuit 3 is, in this particular embodiment, arranged such that no signal shift is effected when the control signal V_{con} which is inputted to the shift circuit is zero. As can be seen, in this embodiment the control signal V_{con} is the output voltage of differential amplifier 5. Consequently, there will be no signal shift when the output signal V_{rms} of the signal power determination circuit 6 is equal to the reference voltage V_{ref} .

Fig. 3 shows the progression of the signal levels when the control signal V_{con} , after initially being interrupted, is fed to the shift circuit 3. In this particular example it is assumed that V_{ref} has a lower value than V_{rms} . For example, V_{ref} may be equal to zero volts (ground). In this example, the average signal value is initially equal to V_{ref} .

As V_{rms} is greater than V_{ref} , differential amplifier 5 produces a negative control signal V_{con} . As shown in Fig. 3, this negative control signal V_{con} is passed on to the shift circuit 3 after one period of the input signal V_{in} (see also Fig. 2). This in turn causes a negative signal shift in the input signal, thus lowering its average value. This is shown in Fig. 3. After a few cycles, the average value is stabilised at the level of the control signal V_{con} , the absolute value of which is exactly the amplitude of the input signal V_{in} . Hence, the signal at the output terminal 4 (see Fig. 1) is a reliable indication of the signal amplitude.

As can be seen, the device of the present invention is relatively simple, while its feedback loop provides a continuous adjustment, thus allowing to follow any changes in the amplitude or to compensate any adverse environmental effects such as a temperature change.

The embodiment of Fig. 4 contains all circuits of Fig. 1. The decoupling circuit 2 is again constituted by two capacitors C1 And C2 while resistors R1 and R2 constitute coupling circuit 8. The shift circuit 3 involves transistors T3 and T4, which influence the base voltages of transistors T1 and T2, which in turn rectify the incoming signals. The RMS (Root Mean Square) value of the signal is achieved by means of a capacitor C3 and two resistors R3, R4 coupled to the differential amplifier ("gain") section of the circuit. Current sources, which are well known in the art, are shown to provide suitable currents I. An output resistor R5 provides the output signal V_{amp} at the output terminal 4.

As explained above, the amplitude detector 1 of Figs. 1 and 4 embodies the method of the present invention.

The present invention is based upon the insight that shifting the average signal level (DC level) of a signal by such an amount that a maximum or minimum signal value equals a reference level (for example zero volts) produces an excellent indication of the

signal amplitude. The present invention is based on the further insight that a very efficient way of realising this shifting of the average signal level is by using a feedback loop.

It will be understood by those skilled in the art that the present invention is not limited to the embodiments illustrated above and that many modifications and additions may
5 be made without departing from the scope of the invention as defined in the appending claims.

CLAIMS:

17. 10. 2002

(83)

1. Method for determining the amplitude of a signal having a first signal level and a second signal level, the method comprising the steps of:

- removing any DC component from the signal so as to produce an intermediate signal having an average level equal to a reference level,

5 - shifting the intermediate signal by a shift amount so as to produce a shifted signal having a first signal level equal to the reference level, and

- providing said shift amount as an indication of the amplitude of the signal.

10 2. Method according to claim 1, wherein the shifted signal and the reference level determines the shift amount.

3. Method according to claim 1 or 2, wherein the shift amount is continuously determined.

15 4. Device for determining the amplitude of a signal having a first signal level and a second signal level; the device comprising:

- a decoupling circuit for removing any DC component from the signal so as to produce an intermediate signal having an average level equal to a reference level,

20 - a shift circuit for shifting the intermediate signal by a shift amount so as to produce a shifted signal having a first signal level equal to the reference level, and

- an output terminal for providing said shift amount as an indication of the amplitude of the signal.

25 5. Device according to claim 4, wherein the shift circuit is coupled to an output of a differential amplifier which is coupled to receive the reference level and a signal, which is indicative for the power of the shifted signal.

6. Device according to claim 5, wherein a signal power determination circuit is coupled between the shift circuit and the differential amplifier.

15.10.2002

ABSTRACT:

17. 10. 2002

(83)

A method and a device (1) for detecting signal amplitudes by removing any DC component from the signal and then shifting the signal by a shift amount so as to produce a shifted signal having a first signal level equal to a reference level (V_{ref}). The shift amount provides an indication of the amplitude of the signal. To this end, the device (1) includes a
5 decoupling circuit (2), a shift circuit (3) and an output terminal (4). Optionally the device further includes a differential amplifier (5) coupled to receive the reference level (V_{ref}) and an indication of the power of the shifted signal, and a signal power determination circuit (6) coupled between the shift circuit (3) and the differential amplifier (5).

10 Fig. 1

17. 10. 2002

1/2

(83)

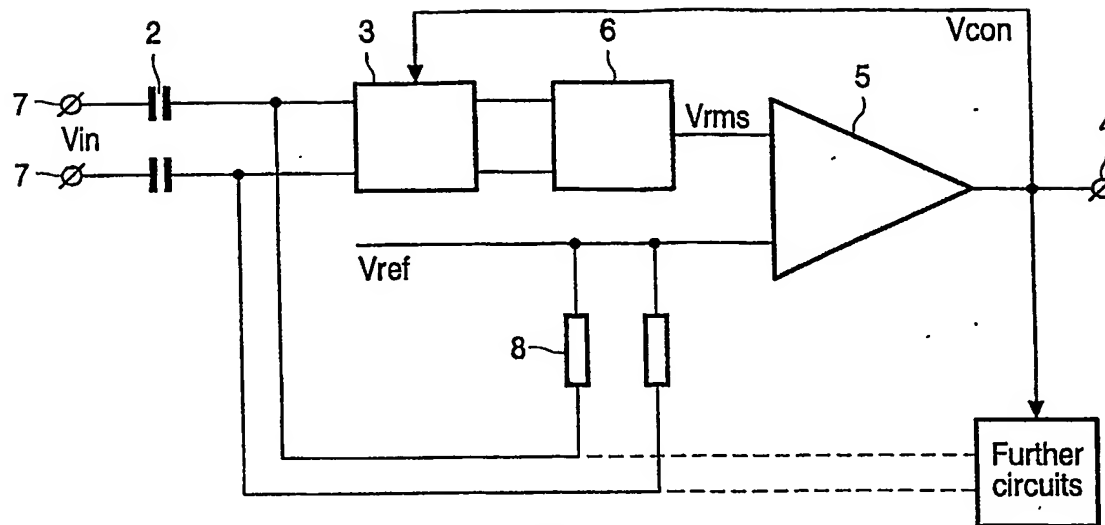


FIG. 1

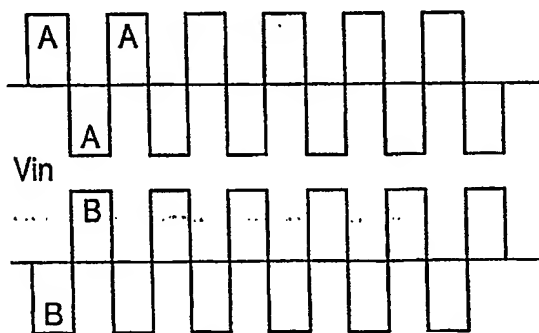


FIG. 2

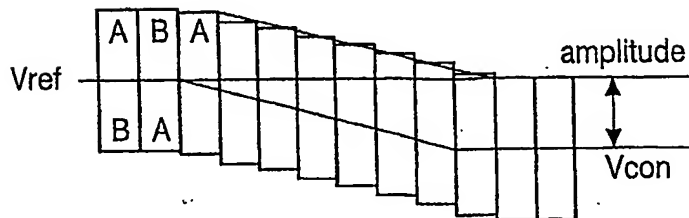


FIG. 3

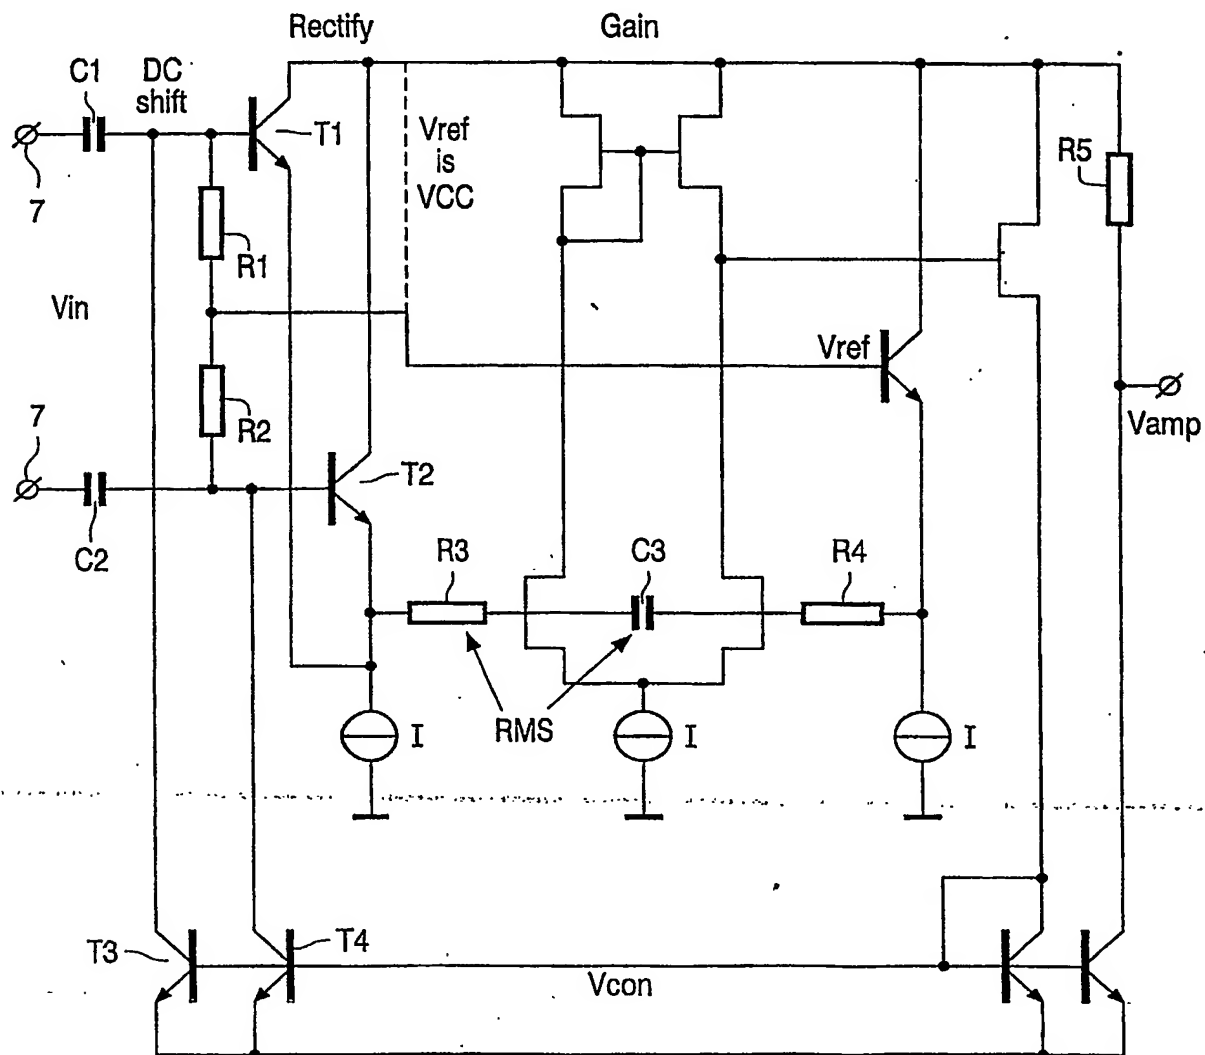


FIG. 4

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.